

EVERPURE® 7CB5 FILTER CARTRIDGE

DELIVERS QUALITY WATER FOR FOODSERVICE APPLICATIONS

7CB5 Replacement Cartridge: EV9618-11



APPLICATIONS

Fountain
Special Problem-Solving Cartridge

FEATURES • BENEFITS

Reduces chlorine taste & odor and other offensive contaminants that can adversely affect the taste of water and beverages

Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination

Finely polishes water for high quality beverage and food applications

Reduces extra fine dirt and particles as small as five (5) microns in size*

Carbon block filter

NSF® Certified under NSF/ANSI Standard 42

*As tested by Pentair

INSTALLATION TIPS

Install vertically with cartridge hanging down.

Allow 2-1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

Flush cartridge by running water through system for five (5) minutes at full flow.

OPERATION TIPS

Change cartridges on a regular six (6) month preventative maintenance program.

Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).

Always flush the filter cartridge at time of installation and cartridge change.

SIZING


Service Flow Rate: Maximum 2.5 gpm (9.46 Lpm)

Rated Capacity: 10,000 gallons (37,854 L)

EVERPURE® 7CB5 FILTER CARTRIDGE

EV9618-11

SPECIFICATIONS

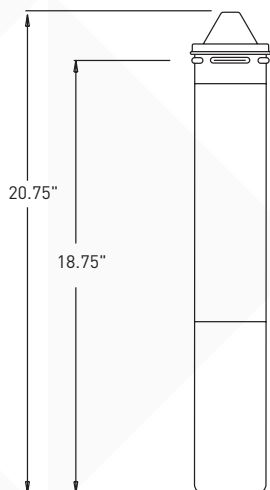

Service Flow Rate

Maximum 2.5 gpm (9.46 Lpm)

Rated Capacity

10,000 gallons (37,854 L)

Pressure Requirements

10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature

35 - 100°F (2 - 38°C)

Overall Dimensions

20.75" L x 3.25" D (52.7 cm x 8.2 cm)



System Tested and Certified
by NSF International against
NSF/ANSI Standard 42 for the
reduction of:

STANDARD NO. 42 —
AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chlorine

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.