

EVERPURE® MC² FILTER CARTRIDGE

DELIVERS PREMIUM QUALITY WATER FOR FOUNTAIN AND COMBINATION APPLICATIONS

MC² Replacement Cartridge: EV9612-56



APPLICATIONS

Fountain
Combination Applications

FEATURES • BENEFITS

Reduces chlorine taste & odor and other offensive contaminants that can adversely affect the taste of beverages

Sanitary cartridge replacement is simple, quick and clean; internal filter parts are never exposed to handling or contamination

Protects drink system seals, pump, tubing and small orifices from clogging, corrosion and abrasive wear

Exclusive precoat filtration provides superior chlorine taste & odor reduction and micro-filters dirt and particles as small as 0.2* micron in size by mechanical means

Improves the taste of fountain beverages and helps retain the drink's carbonation

Proprietary Everpure Micro-Pure® II filtration media effectively inhibits the growth of bacteria on the filter media that can decrease product life

NSF/ANSI Standard 53 certified to reduce cysts such as *Cryptosporidium* and *Giardia* by mechanical means

* Validated by ISO 17025 accredited lab for 99.999% reduction of *Pseudomonas diminuta* following the ASTM F838-05 protocol for the validation of 0.2 µm sterilizing grade filters.

INSTALLATION TIPS

Install vertically with cartridge hanging down.

Allow 2½" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

Flush cartridge by running water through filter for five (5) minutes at full flow.

OPERATION TIPS

Change cartridges on a regular six (6) month preventative maintenance program.

Change cartridges when capacity is reached or when pressure falls below 10 psi (0.7 bar).

Always flush the filter cartridge at time of installation and cartridge change.


SIZING

Service Flow Rate: Maximum 1.67 gpm (6.3 Lpm)

Rated Capacity: 9,000 gallons (34,068 L)

EVERPURE® MC² FILTER CARTRIDGE

EV9612-56

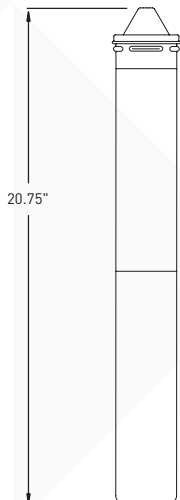

SPECIFICATIONS

Service Flow Rate

Maximum 1.67 gpm (6.3 Lpm)

Rated Capacity

9,000 gallons (34,068 L)

Pressure Requirements

10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature

35 - 100°F (2 - 38°C)

Overall Dimensions

20.75" L x 3.25" D (52.7 cm x 8.2 cm)



System Tested and Certified by NSF International against NSF/ANSI Standards 42 and 53 for the reduction of:

STANDARD NO. 42 – AESTHETIC EFFECTS

Chemical Reduction
Taste & Odor
Chlorine

Mechanical Filtration
Nominal Particulate, Class I

STANDARD NO. 53 – HEALTH EFFECTS

Mechanical Filtration
Cyst Reduction
Asbestos Reduction

EPA No. 002623-IL-002

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used with disinfected water that may contain filterable cysts.

Since the conditions under which our products may be used are beyond our control, we cannot accept any liability with respect to the improper installation, application and/or use of our products.

