





HOSPITALITY



OFFICE

waterPLUS  
BEVERAGE INNOVATIONS

## REBEL 60L Fizz

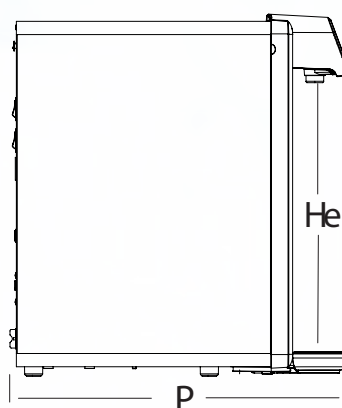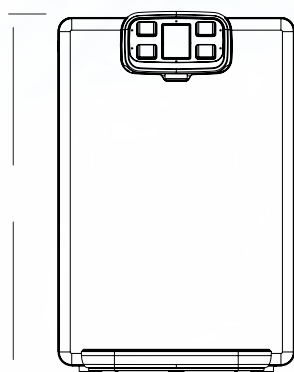

60  
lt/h

stainless  
STEEL

GAS  
R290

I.T.

ICE  
BANK

BevPlus (PTY) LTD.

13 Michigan Street, Airport Industria, Cape Town, 7490, South Africa

[www.bevplus.com](http://www.bevplus.com) | +27 (0)21 820 9500 | [info@bevplus.com](mailto:info@bevplus.com)

## TECHNICAL SPECIFICATIONS

| Rebel 60L FIZZ                       |                                                                                                   |                                                 |
|--------------------------------------|---------------------------------------------------------------------------------------------------|-------------------------------------------------|
|                                      | 60 Fizz                                                                                           | 60                                              |
| Cooling capacity [L/h]               | 60                                                                                                |                                                 |
| Specifications                       | CAS                                                                                               | CA                                              |
| Power supply                         | 230V - 50Hz                                                                                       |                                                 |
| User interface group                 | LED pushbuttons                                                                                   |                                                 |
| Pump                                 | Membrane carbonation pump                                                                         | n/a                                             |
| Cooling technology                   | Ice Bank - single coil                                                                            |                                                 |
| Ice bank capacity [L]                | 6,5                                                                                               |                                                 |
| Ice bank [Kg]                        | 4                                                                                                 |                                                 |
| Condensation                         | Ventilated condensation                                                                           |                                                 |
| Max. hot water temperature           | n/a                                                                                               | n/a                                             |
| Boiler capacity [L]                  | n/a                                                                                               |                                                 |
| Boiler power [W]                     | n/a                                                                                               | n/a                                             |
| Rated compressor power [HP]          | 1/5                                                                                               |                                                 |
| Power consumption [W]                | 344                                                                                               | 266                                             |
| Max. current draw [A]                | 1,89                                                                                              | 1,56                                            |
| Water connection [mm]                | 8                                                                                                 |                                                 |
| CO <sub>2</sub> connection [mm]      | 8                                                                                                 | n/a                                             |
| Dispensing area height he [mm]       | 365                                                                                               |                                                 |
| Version                              | Countertop                                                                                        |                                                 |
| Net weight [Kg]                      | 26                                                                                                | 24                                              |
| Gross weight [Kg]                    | 29                                                                                                | 27                                              |
| Dimensions WxDxH [mm]                | 321 x 577 x 492                                                                                   |                                                 |
| Packaging dimensions WxDxH [mm]      | 385 x 635 x 550                                                                                   |                                                 |
| Material                             | Painted galvanized sheet metal; plastic                                                           |                                                 |
| Alarms                               | Water shortage                                                                                    | n/a                                             |
| Other features                       | Internal space for filtration and Co2 cylinder; anti-splash grid                                  | Internal space for filtration; anti-splash grid |
| Installation requirements            |                                                                                                   |                                                 |
| Inlet water pressure                 | Max. 3,5 bar                                                                                      |                                                 |
| Operating CO <sub>2</sub> pressure   | 3,5 - 4 bar                                                                                       |                                                 |
| Temperature of the operating ambient | Min.16°C - Max. 32°C                                                                              |                                                 |
| Certifications                       | <a href="https://www.blupura.com/en/product/rebel/">https://www.blupura.com/en/product/rebel/</a> |                                                 |

BevPlus (PTY) LTD.

13 Michigan Street, Airport Industria, Cape Town, 7490, South Africa

[www.bevplus.com](http://www.bevplus.com) | +27 (0)21 820 9500 | [info@bevplus.com](mailto:info@bevplus.com)