





DOMESTIC



OFFICE

waterPLUS
BEVERAGE INNOVATIONS

BLUSODA HOT FIZZ 30L

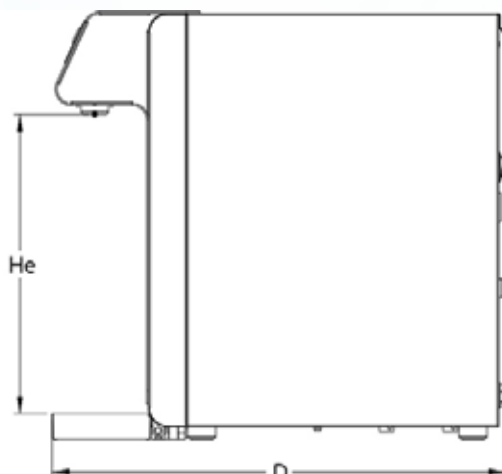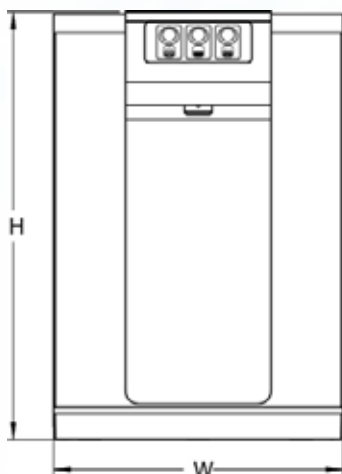

BevPlus (PTY) LTD.

13 Michigan Street, Airport Industria, Cape Town, 7490, South Africa

www.bevplus.com | +27 (0)21 820 9500 | info@bevplus.com

TECHNICAL SPECIFICATIONS

BLUSODA HOT 30 FIZZ	
Cooling capacity (l/h)	30
Max continuous supply (l)	6
Cold water temperature*	5 - 12 °C
Pump	Professional membrane carbonation pump
Cooling technology	Aluminum fusion block
Condensation	Forced ventilation
Refrigerant gas	R290
Max hot water temperature	82°C +/-5%
Boiler capacity (l)	1
Heating capacity (l/h)	4
Watt boiler	1000 W
Adjustable thermostat	Yes
Supply	230 V - 50 Hz
Compressor power	1/8 HP
Absorbed power	810 W - 3,8 A
Working room temperature	Min 5°C - Max 35°C
Inlet water pipe	Ø5/16" (8 mm)
Inlet CO ₂ pipe	Ø5/16" (8 mm)
Dispensing area height (mm)	276
Typology	Countertop
Net weight (kg)	30
Gross weight (kg)	32
Dimensions W x D x H (mm)	261 x 499 x 418
Packaging dimensions (mm)	310 x 540 x 470
Dispensing options	Cold still, cold sparkling, room temperature and hot water (mod. Hot Fizz)
Materials	Parts in robust stainless steel
Push buttons	Stainless steel push buttons
Alarms	No water, no gas, boiler temperature probe fault, boiler fault, boiler overheating
OTHER CHARACTERISTICS	
Energy saving device. Safety device to prevent accidental hot water dispensing	
OPTIONAL	
Water pressure reducer	
CO ₂ pressure reducer	
Filters	UVC OUT (inside)
Cabinet	BLUSODA CABINET in stainless steel
CERTIFICATIONS	
    	